Serge Ferrari

Soltis
Veozip

A new vision
of outdoors

Enjoy the shade and keep your view.

Soltis Veozip is the ideal fabric for enjoying your outdoor view due to its unmatched transparency. Its matt, woven aspect will embody your terrace's warm, elegant design.

As an effective extension of your living space, your pergola equipped with **Soltis Veozip** creates a real cocoon outside. You'll fully enjoy your fun times sheltered from the wind and heat, while remaining within your outdoor environment.

Hemp-based composition for natural fabric aspect

Filters up to 95% of UV radiation

Plays on transparency

Protects from wind

Serge Ferrari | Soltis Veozip

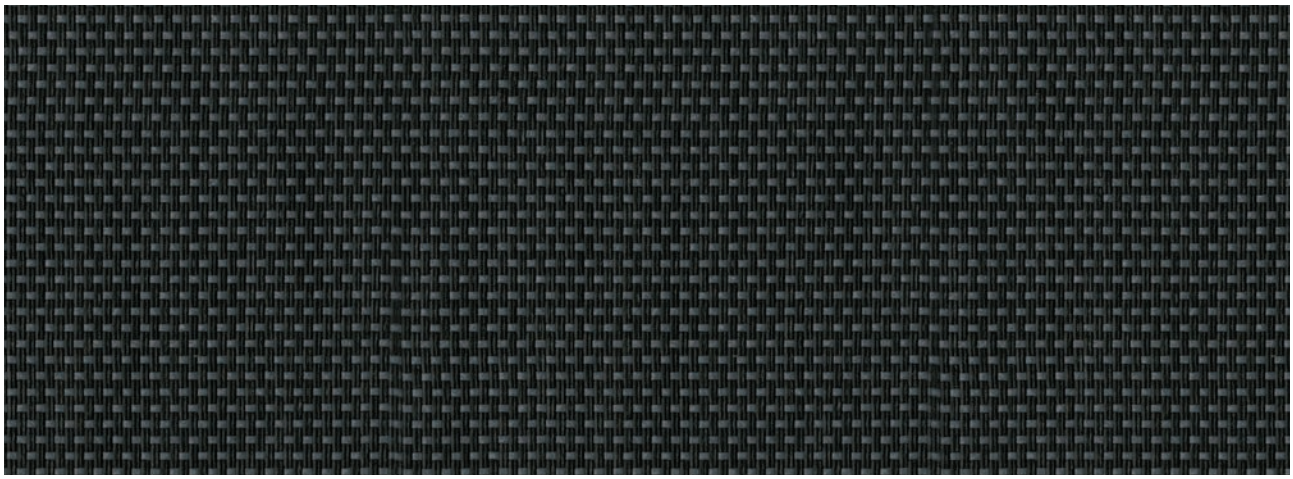

Shadow 7605-51194

Perfect integration into ZIP systems

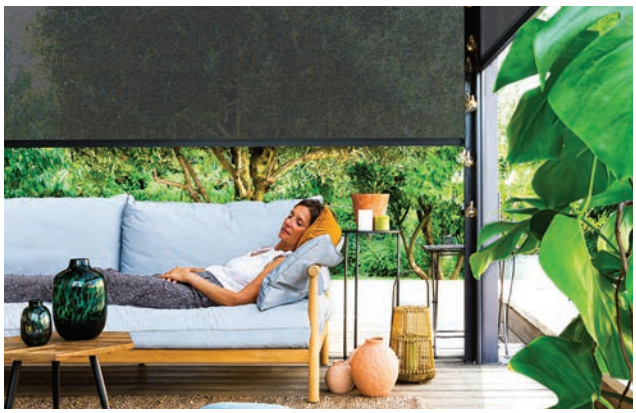

Optimum thermal comfort to take maximum advantage of your terrace without excessive heat in mid-summer

Glare control for greater visual comfort during relaxing or remote working times

Personalise the pergola of your dreams!

Scan this QR code to configure your pergola

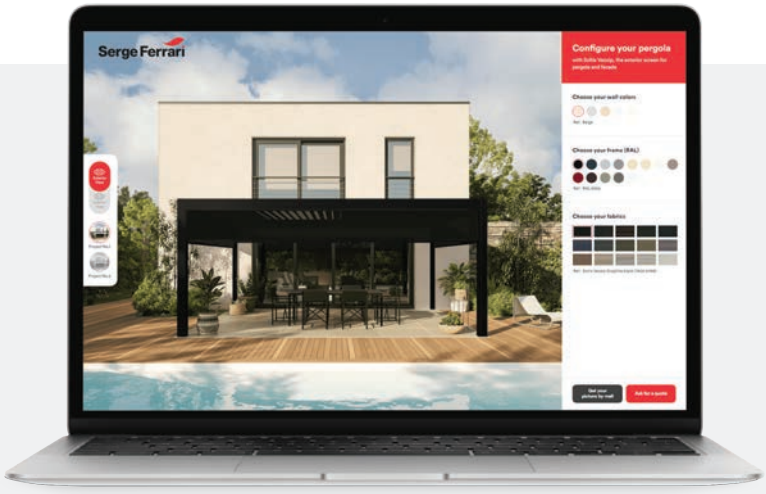

RAW

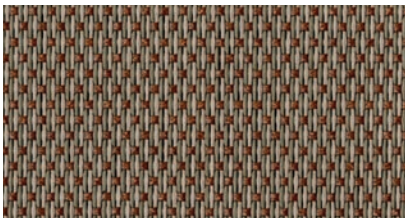

Macadamia 7605 - 51188

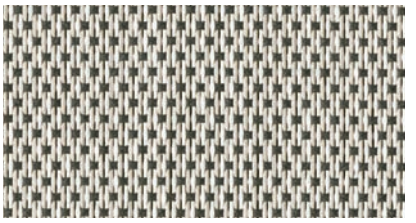

Edelweiss 7605 - 51185

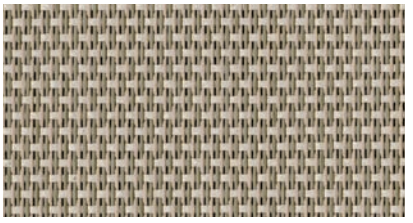

Natural 7605 - 51187

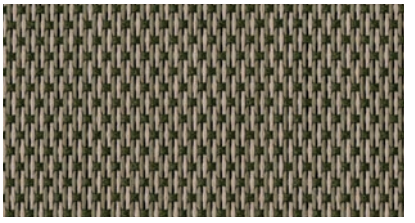

Tundra 7605 - 51190

RAL **9010**

RAL **1013**

RAL **1015**

TROPICAL

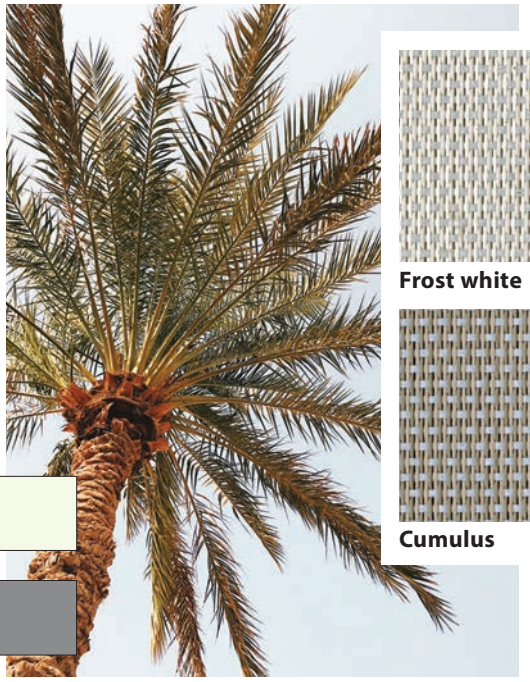

RAL **9016**

RAL **7030**

RAL **7039**

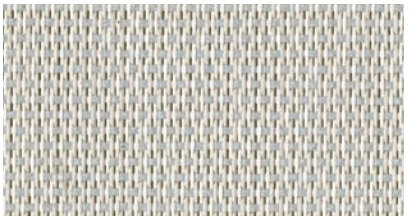

Frost white 7605 - 51184

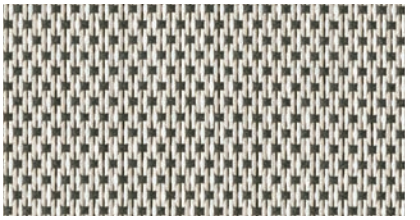

Edelweiss 7605 - 51185

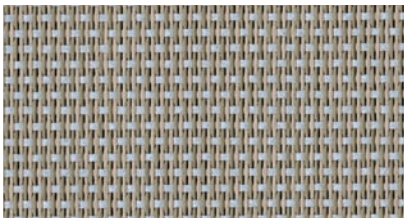

Cumulus 7605 - 51186

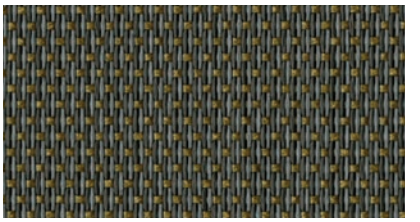

lunar surface 7605 - 51191

ELEGANT

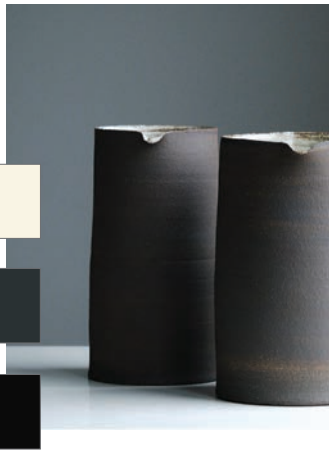

RAL **9010**

RAL **7016**

RAL **9005**

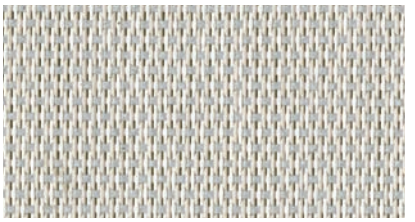

Frost white 7605 - 51184

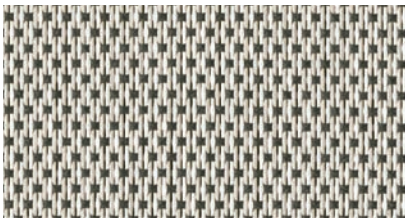

Edelweiss 7605 - 51185

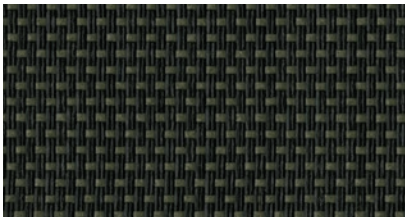

Volcano 7605 - 51195

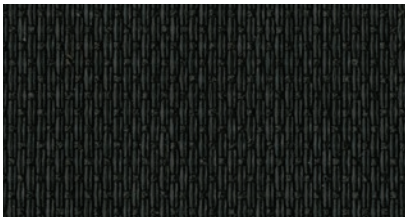

Graphite black 7605 - 51198

SPICE



RAL **1019**

RAL **8019**

RAL **3004**

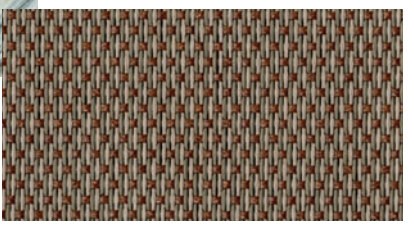

Macadamia 7605 - 51188

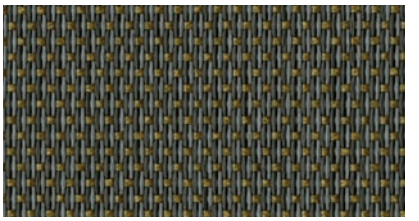

Lunar surface 7605 - 51191

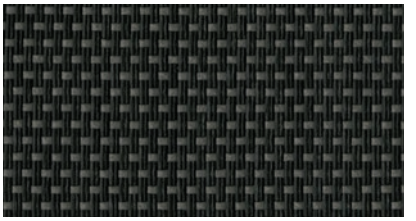

Grey pepper 7605 - 51197

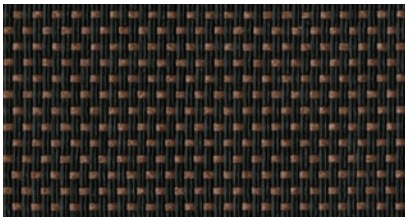

Sandalwood 7605 - 51196

RAL **7035**



RAL **9007**

RAL **7016**

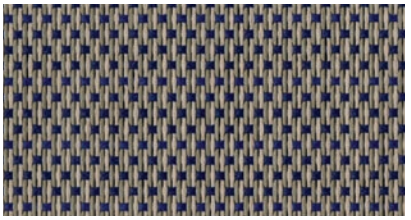

Mistral 7605 - 51189

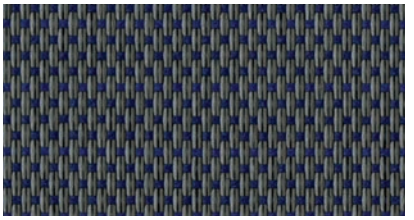

Sea urchin 7605 - 51193

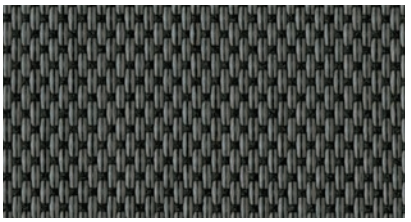

Sea lion 7605 - 51192

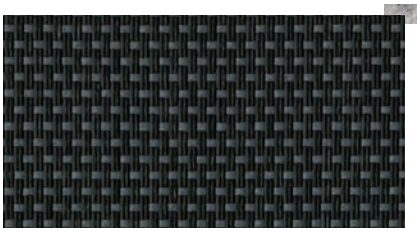

Shadow 7605 - 51194

PURE

Solar and light properties

		TS	RS	AS	TV n-h	g_{tot}^{e} EN13363-2 Type C glazing	g_{tot}^{e} EN13363-2 Type D glazing	14501 Class g_{tot}^{e} EN13363-2 Type C ou D glazing
Frost white **51184**		9	59	32	8	0,07	0,04	4
Edelweiss **51185**		9	50	41	8	0,07	0,04	4
Cumulus **51186**		6	37	57	6	0,06	0,04	4
Natural **51187**		7	37	56	7	0,06	0,04	4
Macadamia **51188**		5	29	66	4	0,05	0,03	4
Mistral **51189**		5	28	67	5	0,05	0,03	4
Tundra **51190**		6	27	67	5	0,05	0,04	4
Lunar surface **51191**		7	18	75	6	0,06	0,04	4
Sea lion **51192**		8	13	79	7	0,07	0,05	4
Sea urchin **51193**		6	17	77	6	0,06	0,04	4
Shadow **51194**		5	7	88	5	0,06	0,04	4
Volcano **51195**		5	7	88	5	0,05	0,04	4
Sandalwood **51196**		6	10	84	6	0,06	0,04	4
Grey pepper **51197**		5	8	87	5	0,05	0,04	4
Graphite black **51198**		5	5	90	5	0,06	0,04	4

TS : Solar Transmission (%)
RS : Solar Reflection (%)
AS : Solar Absorption (%)
TS + RS + AS = 100% of incident energy
TV n-h: Normal-hemispherical visible light transmission (%)
g_{tot}^{e} : Outdoor solar factor

* EN 13363-2 detailed method

Consider the spectral transmission and reflection values for the glazing + blind combination to calculate the solar factor gtot.
Glazing type:
«C»: Low emission, insulating double glazing - face 3 (4 + 16 + 4; argon-filled) g = 0.59 - U = 1.2
«D»: Low emission, insulating double glazing - face 2 (4 + 16 + 4; argon-filled) g = 0.32 - U = 1.1

Serge Ferrari | Soltis Veozip

Main applications
ZIP blinds (façade and pergola), external blinds, vertical veranda blinds

- Optimised for facade external blinds using ZIP systems
- Gtot^{e} from 3 to 5% with Type D glazing (*)
- Class 4 gtot for any glazing or colour (**)
- Euroclass B-s2, d0
- Certification High UV colourfastness

(*) calculation based on EN14501-2

(**) calculation based on EN14501-2 for Type C or D glazing



Filters up to 95% of UV rays

Soltis
Veozip

	Technical properties	Standards
Openness factor	5%	
Weight	600 g/m²	EN ISO 2286-2
Thickness	0,90 mm	
Roll widths	290 cm - 320 cm*	

	Roll length	
Standard format: 290 cm roll width	42 lm	
Standard format: 320 cm roll width	35 lm	

	Physical properties	
Breaking resistance (warp/weft)	250 / 170 daN / 5 cm	EN ISO 1421
Tear resistance (warp/weft)	25 / 25 daN	DIN 53.363

	Fire resistance	
Rating	**M1**/NFP 92-507 — **B1**/DIN 4102-1 — BS 7837 — BS 5867 — **C UNO**/UNI 91-77 — **Classe 1**/EN 13373 — **Method 1**/NFPA 701 — CSFM T19 — **Class A**/ASTM E84	
Euroclass	**B-s2,d0**	EN 13501-1

	Management system	
Quality		ISO 9001

Certifications, labels, warranties, recyclability

Smart Yarn Technology

5 years warranty

Tools and services

— Life Cycle Assessment and Environmental Health Declarations available on request
— Custom thermal performance simulation service for your projects and associated Soltis solar protection systems. Please contact your Serge Ferrari representative
— Evaluation tool for energy savings achieved with Soltis solar protection systems: www.textinergie.org
— Document and photo library: www.sergeferrari.com

Quoted technical characteristics are average values subject to +/- 5% tolerance.
The purchaser of our products is responsible for their application or transformation in relation to possible third party rights. Moreover, the purchaser of our products is responsible for their installation and usage in compliance with the standards, working practices and safety regulations of their destination country. Please refer to our warranty document with regard to contractual liability.
Values quoted in this document are commonly used test results for design purposes. They are given for information only in order to offer our customers optimum usage of our products. Our products are subject to improvements resulting from technical developments and we reserve the right to modify their characteristics at any time. The purchaser of our products is responsible for checking the above data.

* Available during 2021.

Soltis and Précontraint are Serge Ferrari brands.
Photos: Résidence privée, France, ©SergeFerrari, ©Vanessa Andrieux et ©ZUH Visuals
EN Ref.: CT-01244- 02/2021

Serge Ferrari

Serge Ferrari SAS
+33 (0)4 74 97 41 33
sergeferrari.com